



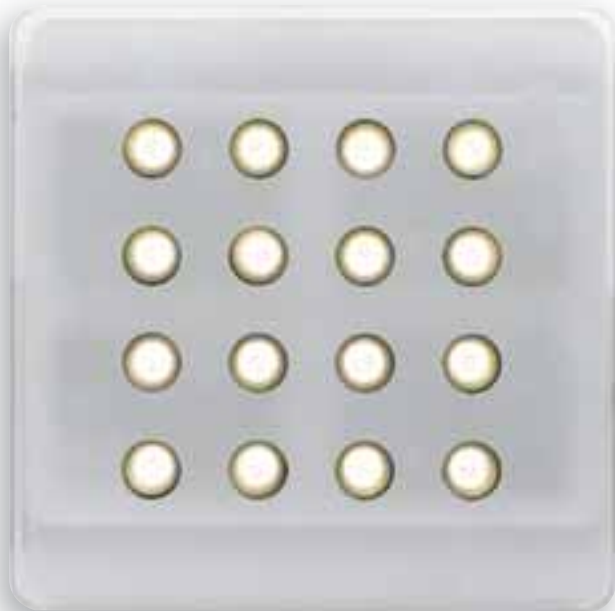

Struttura in metacrilato serigrafato. Modulo LED con substrato ceramico e dissipatore in alluminio. Installazione del prodotto in superficie. Alimentazione diretta 230V. Structure in silk-screen methacrylate. LED board with ceramic layer and aluminium heatsink. Surface mounting. 230V direct power supply. Structure en metacrylat sérigraphé. Platine LED avec couche en ceramique et dissipateur en aluminim. Montage en surface. Alimentation directe 230V. Estructura en metacrilato serigrafado. Platina LED con estrato en ceramico y disipador en aluminio. Instalaciòn en superficie. Alimentaciòn directa 230V. Körper aus siebgedrücktem Methakrylate. LED Platine mit Schicht aus Keramik und Kühlkörper aus Akluminium. Montieurg auf Oberfläche. 230V direkte Stromversorgung.

Lente Lens	Codice Code	Finitura Finishing	LED	Flusso Flux	Potenza Wattage	Dimensioni cm. Sizes cm.
	L55030-01 L55030-02	satinato satin-finished satinato satin-finished	 3000K  4000K	1220 lm 1437 lm	16 LED x 2W (Vin 230V) 16 LED x 2W (Vin 230V)	  kg 1,10

